

**OASIS 27 SERIES RECESSED ROUND LED DOWNLIGHT**

MODEL: OS 427



**SIRIM**  
MS IEC 60598-2-2 : 1998  
MS IEC 60598-1 : 2012

**Specifications & Technical Data**

**Luminaires:**


- Mild Steel Rim & Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

**Areas of Application:**

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

**Replace:**


- 1x26W CFL Downlight &**
- Save Over 50% on Energy**

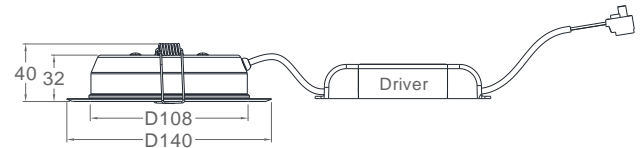

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220~240V, 50/60Hz, PF 0.50)	Hole Cut (mm)
OS 427	1100lm	11W	0.09A	OS402-R-36-xxxxK-G2	VLD 10/250/40 (30K Hrs)	D125

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)		
OS402-R-36-xxxxK-G2 (SMD 2835 12C3B)	250mA	1440lm	9W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	350mA	2000lm	12.5W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

**Photometric Data**

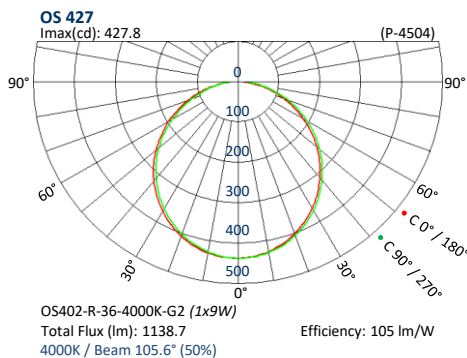

Flux Out: 324.1 lm

Height (M)	Lux	CM
1	310	115
2	77	231
3	34	346
4	19	462
5	12	577

Height      Angle: 60°      Diameter