

OASIS 27 SERIES RECESSED ROUND LED DOWNLIGHT
MODEL: OS 627


SIRIM
MS IEC 60598-2-2 : 1998
MS IEC 60598-1 : 2012

Specifications & Technical Data
Luminaires:


- Mild Steel Rim & Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building


Replace:

**2x18W CFL Downlight &
Save Over 50% on Energy**

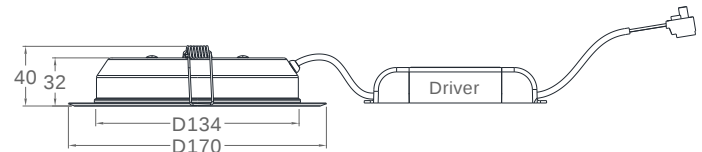

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220~240V, 50/60Hz, PF 0.50)	Hole Cut (mm)
OS 627	1700lm	15W	0.12A	OS602-R-48-xxxxK-G2	VLD 15/350/43 (30K Hrs)	D150

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS602-R-48-xxxxK-G2 <i>(SMD 2835 12C4B)</i>	250mA	1360lm	8.5W	34V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	350mA	2000lm	12.5W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

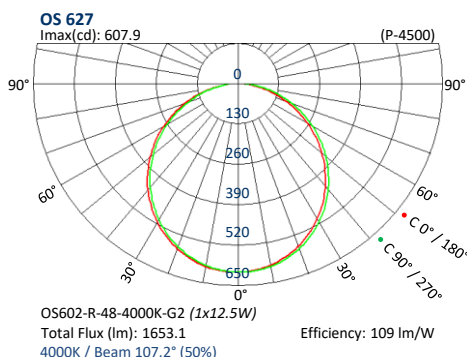Photometric Data


Flux Out: 462.3 lm

Height (M)	Lux	CM
1	441	115
2	110	231
3	49	346
4	28	462
5	18	577

Height Angle: 60° Diameter

Date: 09 October 2023

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.