

**OASIS 27 SERIES RECESSED ROUND LED DOWNLIGHT**

MODEL: OS 727



**SIRIM**  
MS IEC 60598-2-2 : 1998  
MS IEC 60598-1 : 2012

**Specifications & Technical Data**

**Luminaires:**


- Mild Steel Rim & Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

**Areas of Application:**

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

**Replace:**


- 2x26W CFL Downlight &**
- Save Over 50% on Energy**

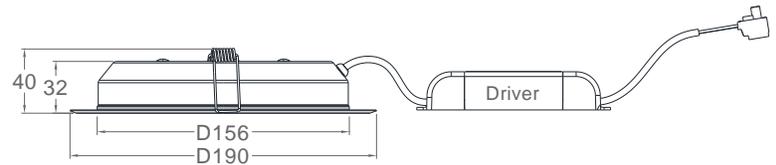

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220~240V, 50/60Hz, PF 0.90)	Hole Cut (mm)
OS 727	2200lm	19W	0.08A	OS702-R-55-xxxxK-G2	VLD 25/500/50 (30K Hrs)	D170

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)		
OS702-R-55-xxxxK-G2 (SMD 2835 11C5B)	350mA	1955lm	11.5W	32V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	500mA	2640lm	16.5W	33V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

**Photometric Data**

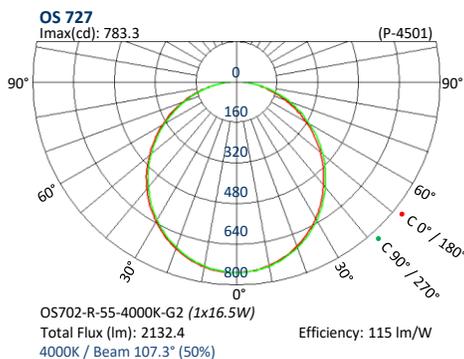

Flux Out: 596.0 lm

Height (M)	Lux	CM
1	569	115
2	142	231
3	63	346
4	36	462
5	23	577

Height      Angle: 60°      Diameter