

**T8 LED Slim Batten Fitting**

**Model: OS BS 1x1200mm**




**Optional:**

- SSR - Suspension Rod
- SSR 305 (305mm / 12")
- SSR 460 (460mm / 18")
- SSR 610 (610mm / 24")

**Specifications & Technical Data**

- Housing is Fabricated From Mild Steel (*Thickness 0.3mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With 105°C HR PVC Cable
- Connecting Devices of Nylon 3 Way x 2.5mm<sup>2</sup>
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Surface Ceiling / Wall / Suspension


- Optional:**
- VITALITE VECK 18/T8 LED
  - 2 Hours Duration Emergency Powerpack



Model	Luminaires				Dimension - mm			Current (A)	P.F. (λ)
	No. of Lamp	Power	Beam Angle	Base	L	W	H	± 5 %	>
OS BS 1x1200mm	1	1 x 14W	150°	G13	1222	42	68	0.06	> 0.90

Lamp (AC Input 100-240V, 50/60Hz, Athd < 15%) (4ft)											
Brand	Code	Type	Base	Lumens (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Current	P.F.	Lifespan (Hrs)
TOSHIBA	T8 LEDtube PRO 1200mm 14W 4000K (RLDL0284C1440G1EX1)	T8 LED	G13	2100lm	14W	4000K	≥ 80Ra	≤ 6	0.06	> 0.9	50000Hrs
TOSHIBA	T8 LEDtube PRO 1200mm 14W 6500K (RLDL0284C1465G1EX1)	T8 LED	G13	2100lm	14W	6500K	≥ 80Ra	≤ 6	0.06	> 0.9	50000Hrs

**Photometric Data**

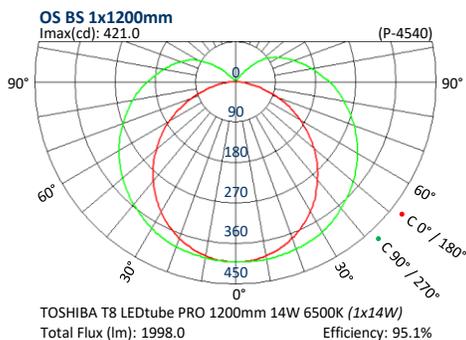

Flux Out: 335.7 lm

(M)	Lux	CM
1	321	115
2	80	231
3	36	346
4	20	462
5	13	577

Height      Angle: 60°      Diameter