

OASIS ST81 SERIES LED STREET LIGHT [60W | 100W | 150W]

Specifications & Technical Data
Features & Benefits:

- Cost-effective product, economical design for project and wholesale.
- Light Source: 3030 LED Chip, > 130 lm/W.
- Photocell, Dali, 0/1-10V dimming is optional.
- 7P Nema or Zhaga socket for intelligent control is optional.
- Polycarbonate Optical Lens, Professional light distribution for optimized efficiency on the road surface.
- Adjustable arm.


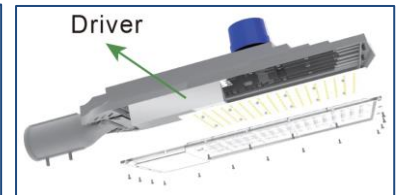
Application:

Open areas, Streets, Roads, Highways, Squares, Parking lots, Pathways, Residential Quarter, Hotels, Campus lighting.

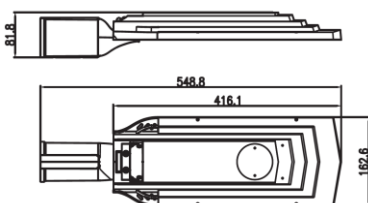
Colour

Silver Texture

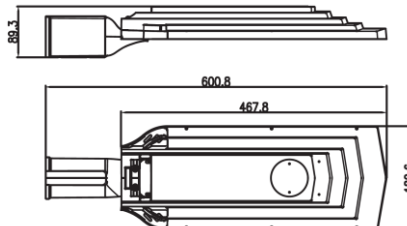
Model	OS ST81060	OS ST81100	OS ST81150
Nominal Power	60W	100W	150W
Input Voltage	100 - 277Vac , 50/60Hz		
Power Factor	0.95		
Light Distribution	Type II		
CCT	4000K		
CRI	> 70Ra		
Protection Grade	IP66 IK08		
LED Chip	3030		
Pole Diameter	40 - 60mm		
Luminous Flux	9000lm	16000lm	25000lm
Housing	Die Casting Aluminium		
Lifespan	50000Hrs		
Ambient Temperature	-20 to +45°C		
Relative Humidity	10% to 95%RH		


Adjustable Angle Installation

Built-In LED Driver

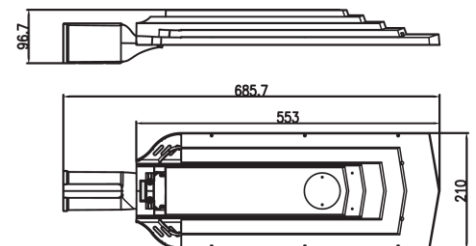
Photocell (Optional)
(Pre-Order Lead Time 4-12 Week)

High Smooth Back Cover

OS ST81060

L548.8 x W162.6 x H81.8


OS ST81100

L600.8 x W182.6 x H89.3


OS ST81150

L685.7 x W210 x H96.7