

OASIS UFO-E SERIES LED HIGH BAY LIGHT

MODEL: OS UFO-E Series

Made to Order




Specifications & Technical Data

Luminaires:

- Aluminum Housing & Heatsink
- Polycarbonate Diffuser Lens
- Nickel Plating Lifting Eye Bolt
- Pre-Connected With 105°C HR PVC Cable
- Safety Steel Wire Included
- Electrostatically Powder Coated
- Hanging Mounted

Areas of Application:




- Warehouse, Factory,
- Area With High Ceilings,
- Public & Commercial Building

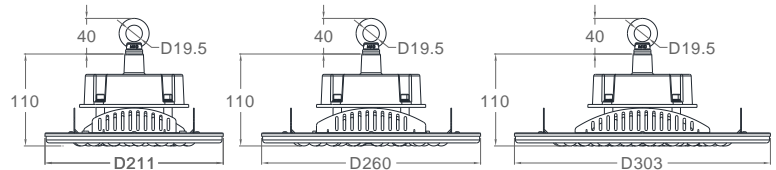

Model	System Lumens (lm)	System Power (W)	Equiv. Metal Halide Power	System Current (A)	Beam Angle (°)	OS LED Module (DC)	SOSEN LED Driver (AC 220~240V, 50/60Hz, PF 0.95)
OS UFO-E200	7000lm	60W	150W	0.26	80°	OS UFO-R-60-6500K-G1	SS-80CNL-E260 (Set 300mA)
OS UFO-E250	11500lm	100W	250W	0.43	80°	OS UFO-R-100-6500K-G1	SS-120CNL-E260 (Set 530mA)
OS UFO-E300	17000lm	150W	300W	0.64	80°	OS UFO-R-168-6500K-G1	SS-150CNL-E260 (Set 760mA)

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS UFO-R-60-6500K-G1 (SMD 3030 20C3B)	300mA	8640lm	54W	180V	6500K	≥ 80	≤ 5	105°C	50000Hrs
OS UFO-R-100-6500K-G1 (SMD 3030 20C5B)	500mA	14400lm	90W	180V	6500K	≥ 80	≤ 5	105°C	50000Hrs
OS UFO-R-168-6500K-G1 (SMD 3030 21C8B)	750mA	22720lm	142W	189V	6500K	≥ 80	≤ 5	105°C	50000Hrs

Photometric Data

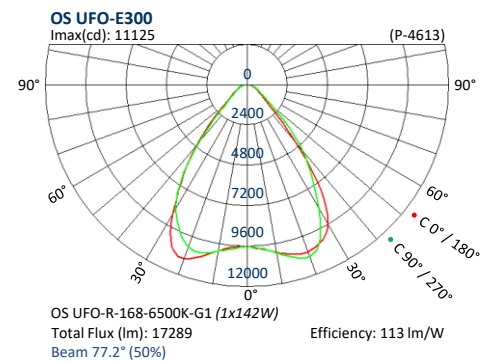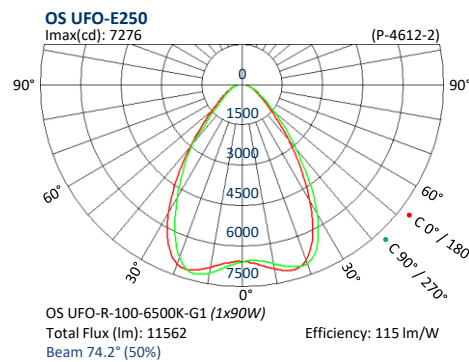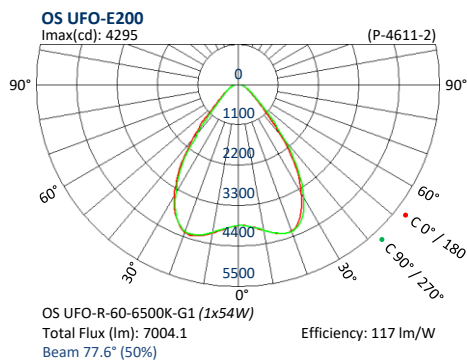

Date: 19 October 2023