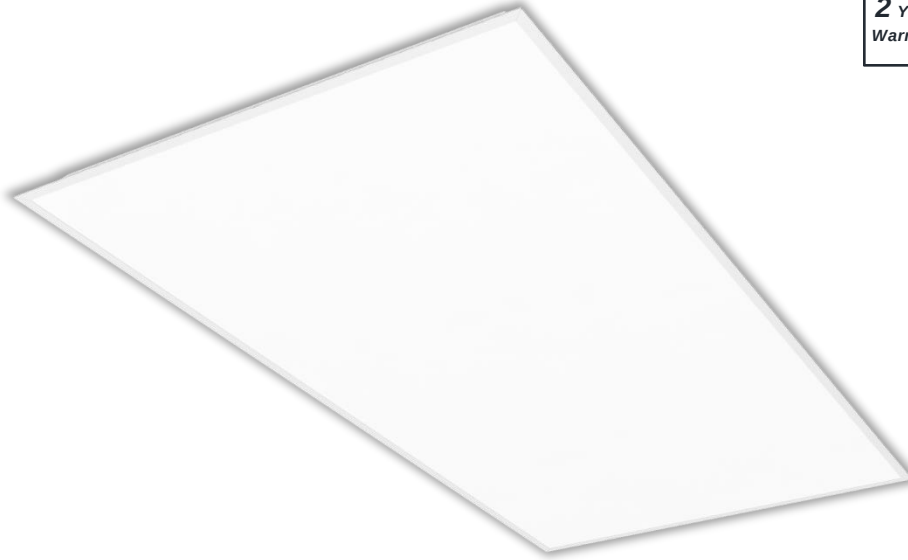


VIP LED PANEL LIGHT TYPE VERTICAL (Recessed T-Bar Ceiling - Imperial / Metric Size)
MODEL: VIP PL24/R (*Imperial Size*) / VIP PL24/R-MM (*Metric Size*)

Specifications & Technical Data
Luminaires:

- Mild Steel Housing (*Thickness 0.3mm*)
- Electrostatically Polyester Powder Coated
- **PS** (*Polystyrene*) **Opal** Diffuser
- Nylon Connecting Devices
- Pre-Connected With PVC Cable
- Recessed T-Bar Ceiling
(*Imperial Size / Metric Size*)

Areas of Application:


Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Shop Lighting, Storage Room,
Public & Commercial Building

Optional:

VITALITE VECK 36LED
≥ 2 Hours Duration Emergency Powerpack


Replace:

3x36W T8 FL & Save Over 50% On Energy

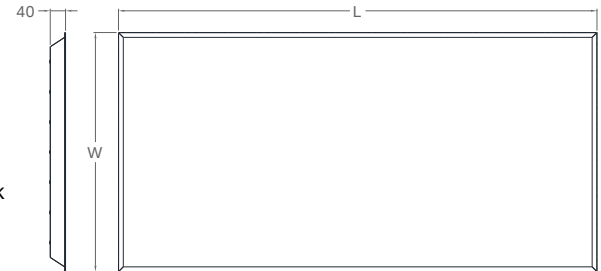

Model	System Lumens (lm)	System Power (W)	Current (A)	Beam Angle (°)	LED Strip Module (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Dimension (mm)	
							L	W
VIP PL24/R	6600lm	64W	0.28	110°	14 x LED STRIP-7-xxxxK-G2	2 x VLD 35/700/50	1215	605
VIP PL24/R-MM	6600lm	64W	0.28	110°	14 x LED STRIP-7-xxxxK-G2		1195	595

LED Strip Module (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
LED STRIP-7-xxxxK-G2 (SMD 2835 7C1B)	100mA	600lm	4.2W	42V	3000K	4000K	6000K	≥ 80	≤ 5	70°C	50000Hrs

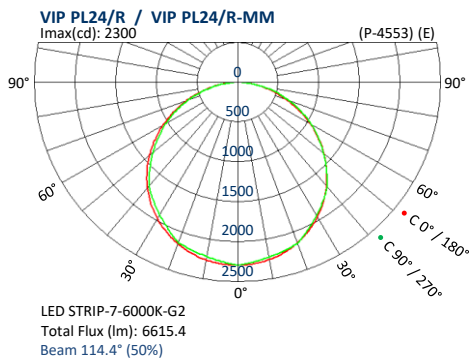Photometric Data


Flux Out: 1778 lm

(M)	Lux	CM
1	1697	115
2	424	231
3	189	346
4	106	462
5	68	577

Height Angle: 60° Diameter